



**SETH ANANDRAM JAIPURIA COLLEGE**  
**(NAAC ACCREDITED)**  
**ESTD. 1945**

Ref. No. : .....

Dated : .....

ROP-150

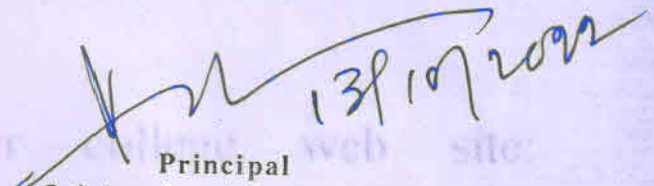
**NOTICE**

**13.10.2022**

Proposed estimate based on PWD (PC) Building Schedule 2017 for repairing, painting and other ancillary civil works of room No: 1 & 3 and renovation in the place of Drinking Water facility at ground floor of our college premises is prepared. The estimated total cost is Rs. 75,204/- (seventy five thousand two hundred four only) including 18% GST and 1% labour cess.

For details please visit our college web site: <https://sajaipuracollege.ac.in> and submit your tender to the designated email-id: [buildingcom@sajaipuracollege.ac.in](mailto:buildingcom@sajaipuracollege.ac.in) & copy to [sajaipuracollege@gmail.com](mailto:sajaipuracollege@gmail.com)

Tender is invited from the interested civil contractors within 7 days of the publication of this notice.

  
Principal  
Seth Anandram Jaipuria College  
Kolkata - 700 005

Repairing, Painting and other ancillary civil works of Room No 1 & 3 at Ground floor of SETH ANANDARAM JAIPURIA COLLEGE AT PREMISES No. 10, RAJA NABA KRISHNA STREET, KOLKATA - 700005.

PROPOSED ESTIMATE BASED ON PWD (RC) BUILDING SCHEDULE 2017.

1. I-1  
P-203 Repairing loose scales, helisters etc from old painted surface & Thoroughly smoothening the surface ....  $540.0\text{m}^2$  @  $21.00/\text{m}^2$  Rs 11340.00
2. I-3  
P-203 Renewing old paint from helistered painted surface of steel or other metal ... including scraping and clearing ...  $12.0\text{m}^2$  @  $47.00/\text{m}^2$  Rs 564.00
3. I-10  
P-196 Acrylic Distemper to interior wall, ceiling with a Coat of solvent based interior grade Acrylic Primer...  $520\text{m}^2$  @  $70.00/\text{m}^2$  Rs. 36400.00
4. I-1  
P-205 Supplying least Indian sheet glass Panes set in putty and fitted and fixed with nails and putty Complete ...  $5.0\text{m}^2$  @  $536.00/\text{m}^2$  2680.00
5. I-1  
P-207 Renewing worn out putty of glass Panes ... 40.0 nos @ 33.00/Each 1320.00
6. I-1(A)  
P-200 Priming one coat on steel or other metal surface with synthetic oil based primer of approved quality ...  $12.0\text{m}^2$  @  $29.00/\text{m}^2$  348.00
7. I-1(B)  
P-200 Priming one coat on timber or plastered surface with synthetic oil based primer of approved quality ...  $24.0\text{m}^2$  @  $38.00/\text{m}^2$  912.00
8. I-2(A)  
P-200 Painting with best quality synthetic enamel paint of approved make & brand including smoothening surface a) on timber or plastered surface ... (high gloss) ivy Two coats (with any shade except white)  $24.0\text{m}^2$  @  $81.00/\text{m}^2$  1944.00

Contd. Item no. 8

b) On steel or other metal surface (highest)

iv) Two coats (with any shade except white)  $12.0m^2 @ 79.00/m^2$  948.00

<sup>3</sup>  
P. 203 Supplying labour for cleaning, etc. Material (M) 200m @ 245.00/E 4900.00

Total - Rs. 61356.68

Add 3% Contingency of Rs 61356.68 = Rs 1840.68

Rs 63196.68

Add 18% GST of Rs 63196.68 = Rs 11375.40

Add 1% Labourcess of Rs 63196.68 = Rs 631.97

Rs 75204.05

Say Rs 75,204.00